

# APPLICATION DESIGNS

## LOCAL DOOR PROP ALARM –


### Components:

1. #7251-CSxAT – 12/24 VDC Sounder on Single Gang Stainless Steel Plate with AT-Timer (adjustable 2 to 60 seconds)
2. Requires dedicated door position switch (contact closed when door is closed).

### Operation:

1. With power on and door closed, sounder is off
2. Opening door starts timer. Sounder remains off.
3. Closing door before time delay expires keeps sounder off.
4. If door remains open at end of delay period, sounder is energized.
5. Closing door after sounder is energized will silence sounder.

### Wiring Diagram:

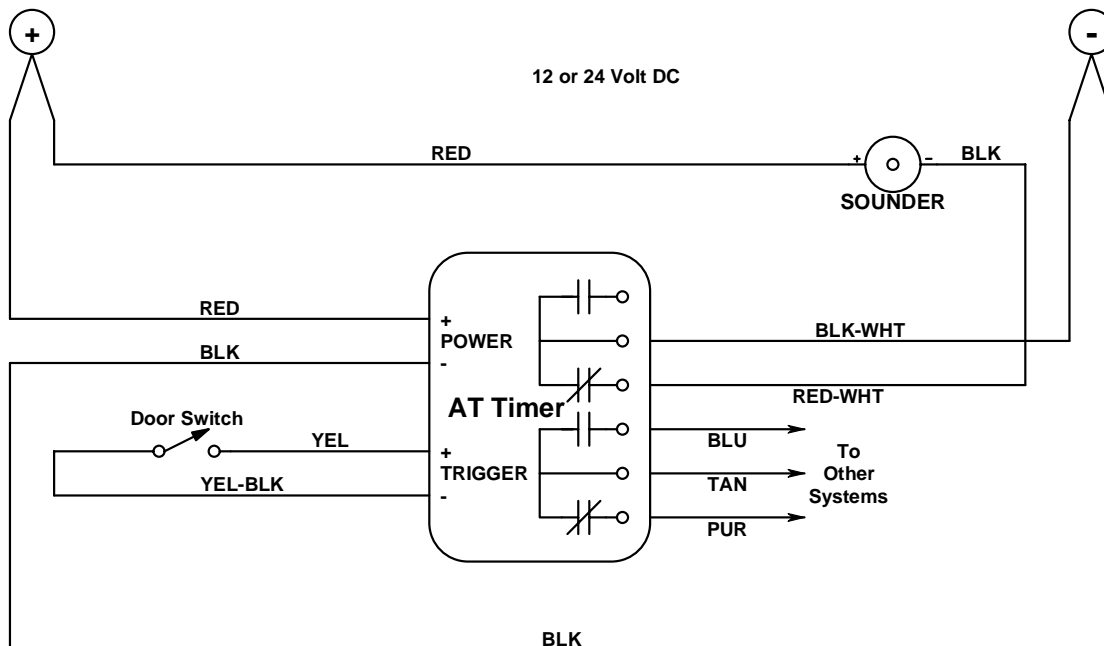

DOOR PROP ALARM



**DORTRONICS SYSTEMS, INC.**

1668 SAG HARBOR TPK. SAG HARBOR NY 11963 Tel 631-725-0505 • 800-906-0137 Fx 631-725-8148