


5200 SERIES PUSH BUTTONS WITH AT or FT TIMER

DPDT 1-60 SECOND TIMER MODULE

ENCLOSED UNIT FOR PUSH BUTTON ELECTRONIC TIME DELAY
 GRAY ABS PLASTIC ENCLOSURE
 8" FLYING LEADS TO CONNECT TO ACCESSORY DEVICES, OR
 CONTROLLERS. UNIT IS DESIGNED TO FIT INTO A ONE GANG
 ELECTRICAL BOX WITH THE ASSOCIATED SWITCH ASSEMBLY.

ADJUSTABLE (xAT)
 FIXED 30 SECOND (xFT)

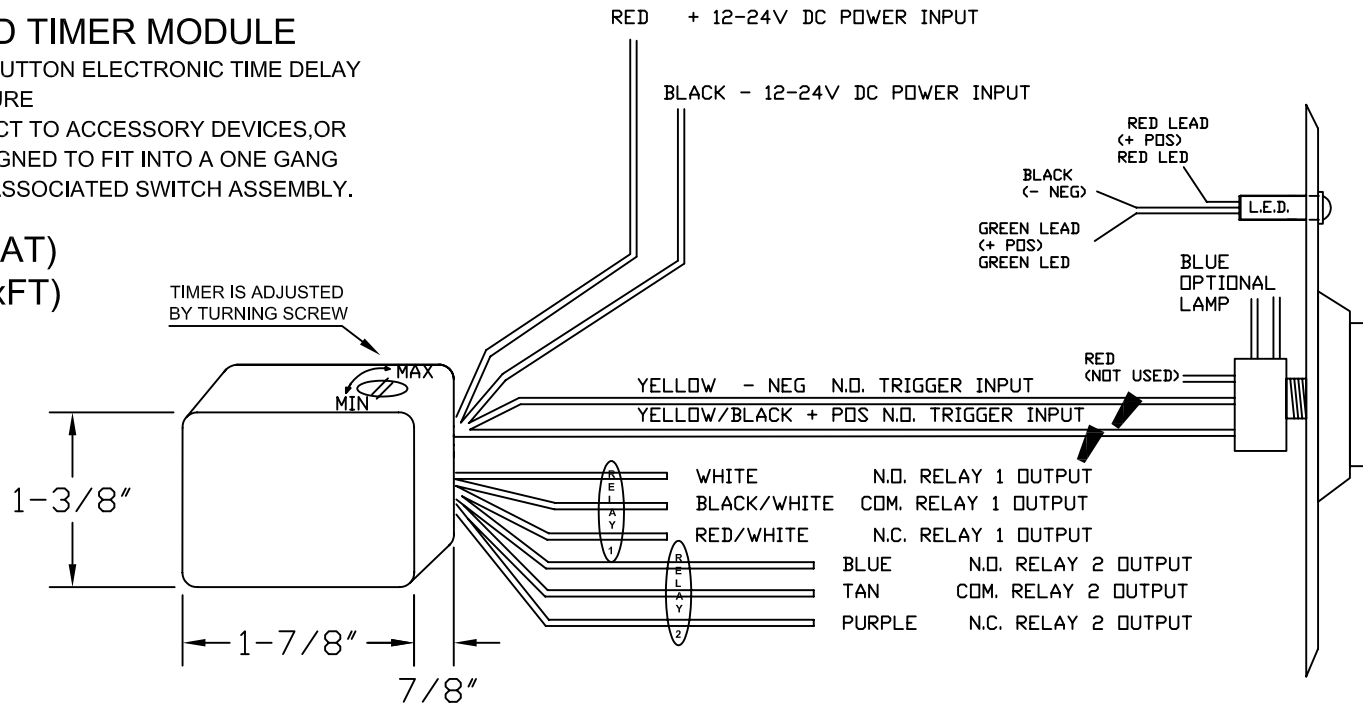

SPECS:

SWITCH RATING:
 3AMPS @ 115VAC OR 24VDC
 UL RECOGNIZED/CSA CERTIFIED

OPERATING TEMP: +5F - +158F


LAMP RATING: 28VDC MAX

L.E.D. RATING: .02A @24VDC


FACE PLATE: .032 THICK STAINLESS

CONTACT RATING 3A @ 24VDC
 CURRENT DRAW .025 AMPS MAX.


MOMENTARY
 PUSH BUTTON
 SPDT- P15



OPTIONAL L.E.D.
 RATING: .02A @24VDC



OPTIONAL LAMP
 RATING 28 VDC MAX



05/02/07



**DORTRONICS
 SYSTEMS, INC.**

1668 SAG HARBOR TPKE., SAG HARBOR, NY 11963
 TEL: (631) 725 0505 FAX: (631) 725 8148 TOLL FREE: 800 906 0137
 WEBSITE: DORTRONICS.COM EMAIL: SALES@DORTRONICS.COM